


3 - LAYER BOARD

IRU-PU

&

IRU-L3

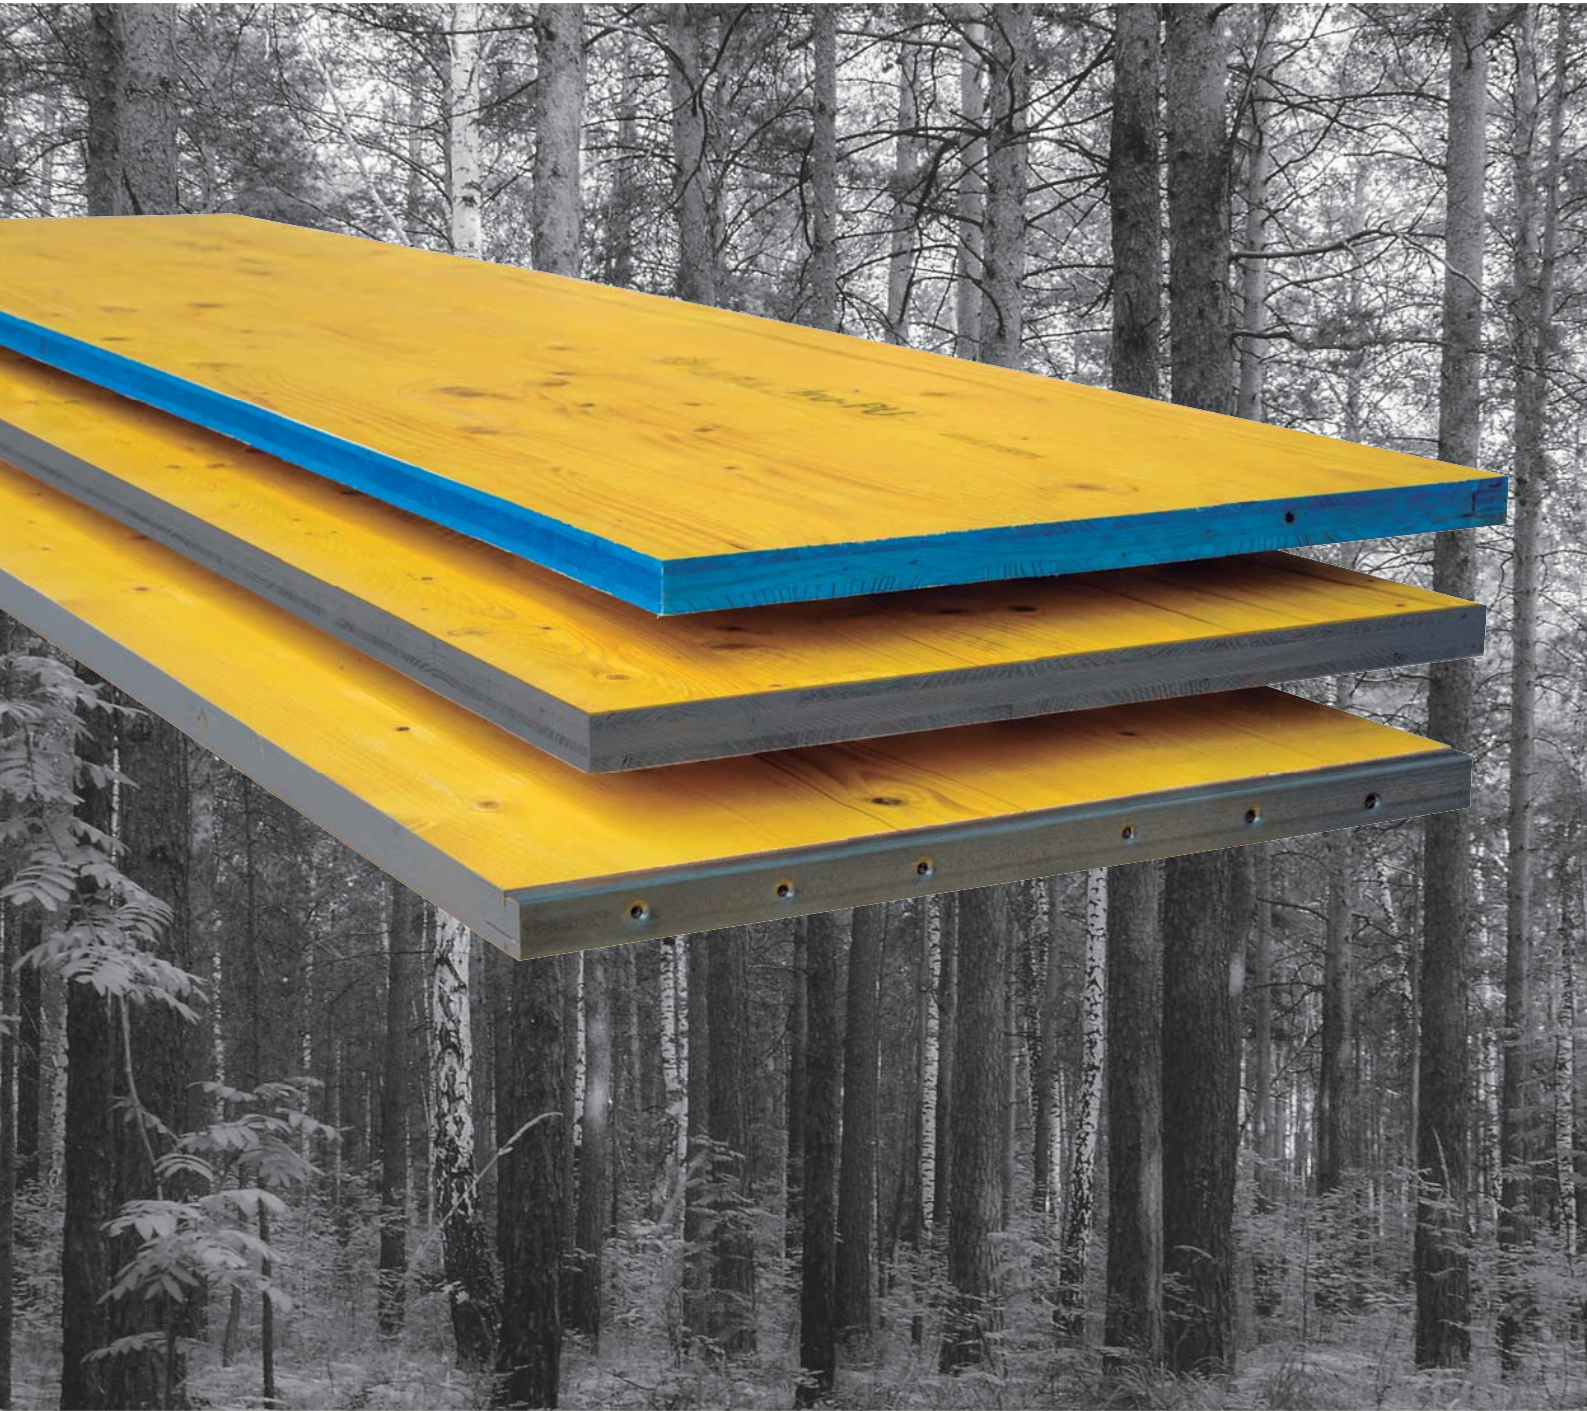

LANA

TECHNICAL CHARACTERISTICS

GLUING

Gluing with Melamine Urea Formol (MUF) under controlled temperature and pressure conditions, bases on the SWP/3 Exterior condition of the UNE CEN/TS 13353 standard.

HUMIDITY

100% automated humidity control systems.

MARKING

All boards marked to guarantee traceability.


BENDING RESISTANCE

Thickness: 27 mm/21 mm
Average = 40 N/mm²
(calculated according to Ö-Norm B3023)


ELASTICITY MODULE

Thickness: 27 mm/21 mm
Average = 10.000 N/mm²
(calculated according to Ö-Norm B3023)

Deflection of formwork panel 27 mm

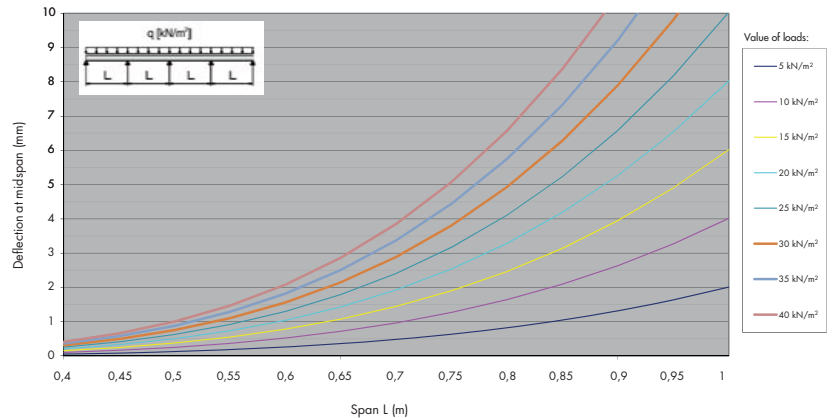


Deflection of formwork panel 21 mm

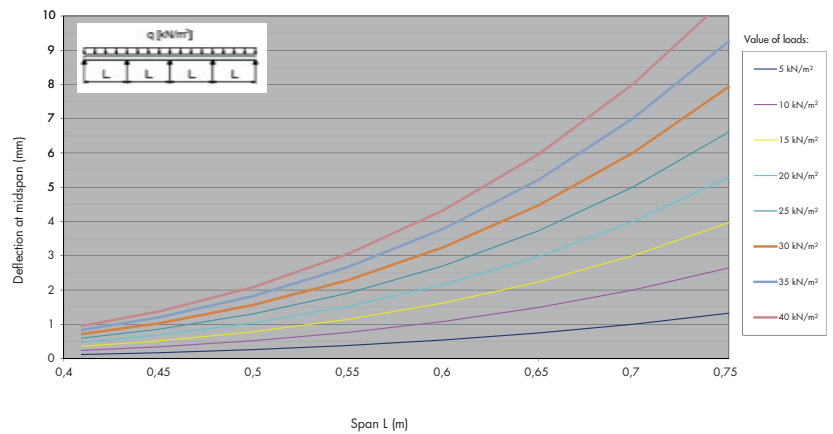

The charts provided are indicative in nature and cannot replace those supplied by the technical officer, responsible for the building work. Lana S. Coop. declines any responsibility in this regard. We reserve the right to modify the specifications contained in this catalogue without prior warning.

Operating manual

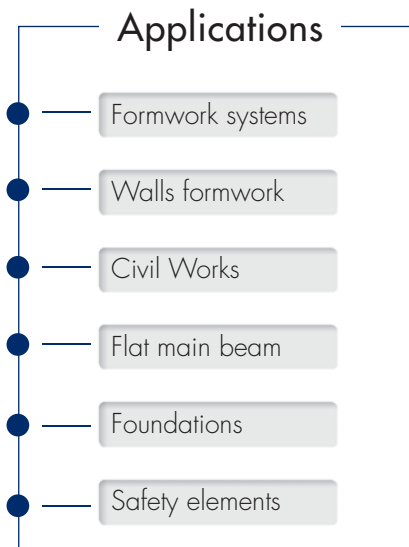

- | Apply formwork stripper before and after use on board faces and edges (even before the first installation).
- | Clean off remains of concrete on board after use.
- | Stack and strap these after use and until they are utilised again.
- | Store indoors protected from meteorological conditions.
- | Do not use for applications other than those typical of formwork.
- | Do not modify the physical-mechanical characteristics of the product.
- | Do not use the product when it appears that this might involve a risk to workers on site.

